

GEOPIER®

RAP Advantage




GEOPIER RAMMED AGGREGATE PIER® (RAP) ELEMENTS

Because of their unique construction method, Geopier Rammed Aggregate Pier® (RAP) elements provide greater capacity than traditional stone columns.

Both Geopier RAP elements and traditional stone columns are constructed with sequential lifts of aggregate. However, traditional stone columns are installed using suspended vibratory probes that only deliver horizontal vibration, while Geopier RAP elements are constructed using the patented Geopier beveled tamper to deliver a high magnitude of vertical compaction energy. This results in a stiffer pier as well as significantly increased horizontal stresses and stiffness in the matrix soils.


The patented Geopier direct ramming process provides unsurpassed strength and stiffness of the RAP element and matrix soil.

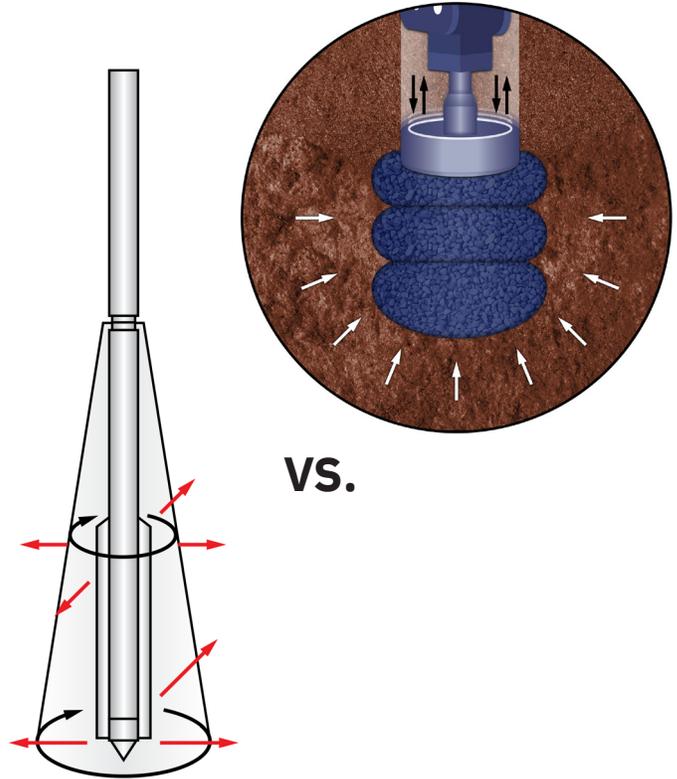

GEOPIER IS GROUND IMPROVEMENT®

THE GEOPIER PROCESS

- **VERTICAL RAMMING** Thin lifts of aggregate are rammed to form a pier with undulating sides. Thin lifts allow for better compaction of the aggregate and results in high shear strength and stiffness. The tamper forces aggregate into the surrounding matrix soils, providing excellent pier-soil coupling.
- **ALTERNATIVE AGGREGATES** The Rammed Aggregate Pier® (RAP) construction method is easily adaptable to use sand, recycled concrete, or cement treated aggregate.
- **SOIL CONDITIONS** Geopier RAP elements may be installed in almost all soil conditions. The vertical ramming process contributes to increased lateral stresses in the matrix soils, which is especially important for soils with silt or clay content that do not respond well to horizontal vibrations only.



GEOPIER RAMMED AGGREGATE PIER® ELEMENTS

VS. STONE COLUMNS

GREATER CAPACITY

The ramming process produces the superior strength of a Geopier Rammed Aggregate Pier® (RAP) and develops constructed aggregate friction angles greater than 48 degrees, almost 40% greater than those reported for stone columns. Higher friction angles provide greater pier stiffness and capacity, which means fewer Geopier elements versus stone columns.

HIGHER BEARING PRESSURE

Superior pier stiffness for higher bearing capacities, which results in smaller footings and lower foundation costs.

BETTER SETTLEMENT CONTROL

The unique ramming process creates piers that are two to five times stiffer than stone columns. Versatile Geopier RAPs can be used for lightly-to heavily-loaded structures.


PROVEN ADVANTAGES

Side by side comparisons demonstrate significant performance differences between Rammed Aggregate Piers and traditional stone columns. Please reference TP41 for more information.



Geopier consistently provides us valuable and informed opinions regarding ground improvement as well as cost effective foundation bearing solutions and alternatives to undercut/replacement and/or deep foundation systems.

Ashfaq Memon, P.E.
Sr. Geotechnical Engineer
Terracon Consultants, Inc.

Friction Angle of Installed Aggregate

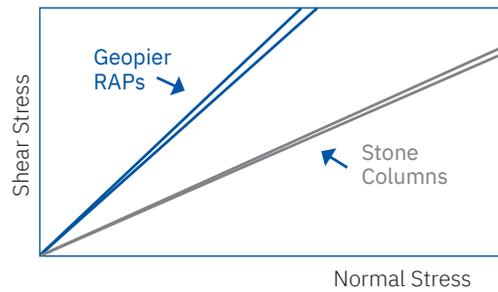

Typical Allowable Bearing Pressure Ranges (ksf)

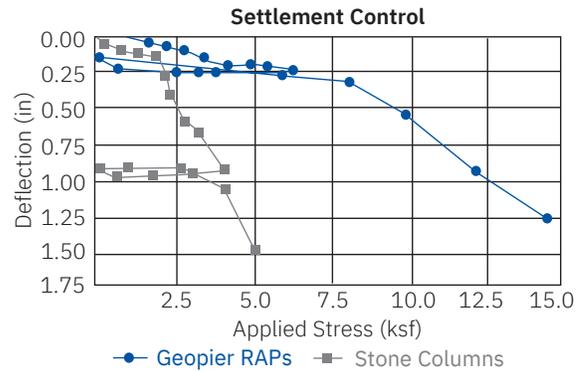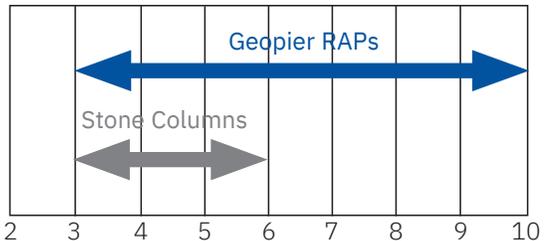

White, et al 2002

THE GEOPIER® ADVANTAGE

- Stiffness of Rammed Aggregate Pier® systems are two to five times stronger than stone columns
- Greater support capacity and higher bearing pressures
- Greater pier capacity resulting in less pier elements (less time on site)
- Better settlement control

Geopier Foundation Company developed the Rammed Aggregate Pier® (RAP) system to provide an efficient and cost-effective Intermediate Foundation® solution for the support of settlement sensitive structures. Through continual research and development, we've expanded our system capabilities to offer you more. Our design-build engineering support and site-specific modulus testing combined with the experience of providing settlement control for thousands of projects, provides an unmatched level of support and reliability to meet virtually all of your ground improvement challenges.

Whether you are an engineer, contractor, or owner - we can help.

130 Harbour Place Drive, Suite 280, Davidson, NC 28036 | (800) 371-7470 | www.geopier.com | info@geopier.com | marketing@geopier.com

©2021 Geopier Foundation Company, Inc. The Geopier® technology and brand names are protected under U.S. patents and trademarks listed at www.geopier.com/ patents and other trademark applications and patents pending. Other foreign patents, patent applications, trademark registrations, and trademark applications also exist.

GEOPIER®
Tensor.